


Штуцер приварной с ниппелем

DASK

DASK.FLD.RU

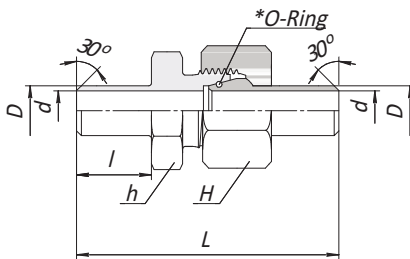

Серия	Заказной код	Наружный диаметр	d	H	h	L	I	PN(бар)	
								Угл.сталь	SS316
S	DASK-10×1.0.FLD.RU	10	8	22	19	58.0	10.0	249	242
	DASK-10×1.5.FLD.RU	10	7	22	19	58.0	10.0	358	349
	DASK-10×2.0.FLD.RU	10	6	22	19	58.0	10.0	460	447
	DASK-12×1.5.FLD.RU	12	9	24	22	65.0	15.0	305	297
	DASK-12×2.0.FLD.RU	12	8	24	22	65.0	15.0	393	383
	DASK-12×2.5.FLD.RU	12	7	24	22	65.0	15.0	476	463
	DASK-16×1.5.FLD.RU	16	13	30	27	74.5	16.5	234	228
	DASK-16×2.0.FLD.RU	16	12	30	27	74.5	16.5	305	297
	DASK-16×2.5.FLD.RU	16	11	30	27	74.5	16.5	372	362
	DASK-16×3.0.FLD.RU	16	10	30	27	74.5	16.5	400	400
	DASK-20×2.0.FLD.RU	20	16	36	32	84.0	19.0	249	242
	DASK-20×2.5.FLD.RU	20	15	36	32	84.0	19.0	305	297
	DASK-20×3.0.FLD.RU	20	14	36	32	84.0	19.0	358	349
	DASK-20×4.0.FLD.RU	20	12	36	32	84.0	19.0	400	400
	DASK-25×3.0.FLD.RU	25	19	46	41	94.5	19.5	294	286
	DASK-25×4.0.FLD.RU	25	17	46	41	94.5	19.5	379	369
	DASK-25×5.0.FLD.RU	25	15	46	41	94.5	19.5	400	400
	DASK-30×3.0.FLD.RU	30	24	50	46	102.0	23.0	249	242
	DASK-30×4.0.FLD.RU	30	22	50	46	102.0	23.0	323	314
	DASK-30×5.0.FLD.RU	30	20	50	46	102.0	23.0	393	383
	DASK-30×6.0.FLD.RU	30	18	50	46	102.0	23.0	400	400
	DASK-38×4.0.FLD.RU	38	30	60	55	111.0	23.0	261	254
	DASK-38×5.0.FLD.RU	38	28	60	55	111.0	23.0	315	311
	DASK-38×6.0.FLD.RU	38	26	60	55	111.0	23.0	315	315
DASK-38×7.0.FLD.RU	38	24	60	55	111.0	23.0	315	315	

По умолчанию уплотнительное кольцо O-Ring поставляется из материала NBR, либо Viton по запросу (стр. 126)