
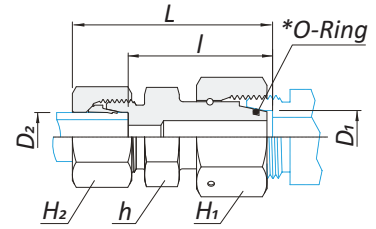


Адаптер понижающий с конусом

DRED

DRED.FLD.RU



Серия L (Light)

Заказной код	Наружный диаметр		H ₁	H ₂	h	L	l	PN(бар)	
	D ₁	D ₂						Угл. сталь	S316
DRED-08L-06L.FLD.RU	8	6	17	14	14.0	39.0	24.5	500	315
DRED-10L-06L.FLD.RU	10	6	19	14	17.0	39.5	24.5	500	315
DRED-10L-08L.FLD.RU		8		17		39.5	24.5	500	315
DRED-12L-06L.FLD.RU	12	6	22	14	17.0	40.0	25.0	400	315
DRED-12L-08L.FLD.RU		8		17		40.0	25.0	400	315
DRED-12L-10L.FLD.RU		10		19		41.0	26.0	400	315
DRED-15L-06L.FLD.RU	15	6	27	14	22.0	42.0	27.5	400	315
DRED-15L-08L.FLD.RU		8		17		42.0	27.5	400	315
DRED-15L-10L.FLD.RU		10		19		43.0	28.5	400	315
DRED-15L-12L.FLD.RU		12		22		43.0	28.5	400	315
DRED-18L-06L.FLD.RU	18	6	32	14	25.0	43.0	28.0	400	315
DRED-18L-08L.FLD.RU		8		17		43.0	28.0	400	315
DRED-18L-10L.FLD.RU		10		19		44.5	29.5	400	315
DRED-18L-12L.FLD.RU		12		22		44.5	29.5	400	315
DRED-18L-15L.FLD.RU		15		27		45.5	30.5	400	315
DRED-22L-06L.FLD.RU	22	6	36	14	28.5	47.0	32.0	250	160
DRED-22L-08L.FLD.RU		8		17		47.0	32.0	250	160
DRED-22L-10L.FLD.RU		10		19		48.0	33.0	250	160
DRED-22L-12L.FLD.RU		12		22		48.0	33.0	250	160
DRED-22L-15L.FLD.RU		15		27		49.0	34.0	250	160
DRED-22L-18L.FLD.RU		18		32		50.0	33.5	250	160
DRED-28L-06L.FLD.RU	28	6	41	14	36.0	49.0	34.0	250	160
DRED-28L-08L.FLD.RU		8		17		49.0	34.0	250	160
DRED-28L-10L.FLD.RU		10		19		50.0	35.0	250	160
DRED-28L-12L.FLD.RU		12		22		50.0	35.0	250	160
DRED-28L-15L.FLD.RU		15		27		51.0	36.0	250	160
DRED-28L-18L.FLD.RU		18		32		52.0	35.5	250	160
DRED-28L-22L.FLD.RU		22		36		54.0	37.5	250	160
DRED-35L-06L.FLD.RU	35	6	50	14	46.0	55.0	40.0	250	160
DRED-35L-08L.FLD.RU		8		17		55.0	40.0	250	160
DRED-35L-10L.FLD.RU		10		19		56.0	41.0	250	160
DRED-35L-12L.FLD.RU		12		22		56.0	41.0	250	160
DRED-35L-15L.FLD.RU		15		27		57.0	42.0	250	160
DRED-35L-18L.FLD.RU		18		32		58.0	41.5	250	160
DRED-35L-22L.FLD.RU		22		36		60.0	43.5	250	160
DRED-35L-28L.FLD.RU		28		41		60.0	43.5	250	160
DRED-42L-06L.FLD.RU	42	6	60	14	50.0	55.0	40.5	250	160
DRED-42L-08L.FLD.RU		8		17		55.0	40.5	250	160
DRED-42L-10L.FLD.RU		10		19		56.0	41.5	250	160
DRED-42L-12L.FLD.RU		12		22		56.0	41.5	250	160
DRED-42L-15L.FLD.RU		15		27		58.0	42.5	250	160
DRED-42L-18L.FLD.RU		18		32		58.0	42.0	250	160
DRED-42L-22L.FLD.RU		22		36		60.0	44.0	250	160
DRED-42L-28L.FLD.RU		28		41		61.0	44.0	250	160
DRED-42L-35L.FLD.RU		35		50		65.0	43.0	250	160

Серия S (Heavy)

Заказной код	Наружный диаметр		H ₁	H ₂	h	L	l	PN(бар)	
	D ₁	D ₂						Угл. сталь	S316
DRED-08S-06S.FLD.RU	8	6	19	17	17.0	44.0	28.0	800	630
DRED-10S-06S.FLD.RU	10	6	22	17	17.0	44.0	29.5	800	630
DRED-10S-08S.FLD.RU		8		19		44.0	29.5	800	630
DRED-12S-06S.FLD.RU	12	6	24	17	19.0	45.0	30.0	630	630
DRED-12S-08S.FLD.RU		8		19		45.0	30.0	630	630
DRED-12S-10S.FLD.RU		10		22		46.0	29.5	630	630
DRED-14S-06S.FLD.RU	14	6	27	17	22.0	47.5	33.0	630	630
DRED-14S-08S.FLD.RU		8		19		47.5	33.0	630	630
DRED-14S-10S.FLD.RU		10		22		48.5	32.5	630	630
DRED-14S-12S.FLD.RU		12		24		48.5	32.5	630	630
DRED-16S-06S.FLD.RU	16	6	30	17	24.0	50.0	35.0	630	400
DRED-16S-08S.FLD.RU		8		19		50.0	35.0	630	400
DRED-16S-10S.FLD.RU		10		22		51.0	34.5	630	400
DRED-16S-12S.FLD.RU		12		24		51.0	34.5	630	400
DRED-16S-14S.FLD.RU		14		27		54.0	36.0	630	400
DRED-20S-06S.FLD.RU	20	6	36	17	28.5	54.0	39.0	420	400
DRED-20S-08S.FLD.RU		8		19		54.0	39.0	420	400
DRED-20S-10S.FLD.RU		10		22		55.0	38.5	420	400
DRED-20S-12S.FLD.RU		12		24		55.0	38.5	420	400
DRED-20S-14S.FLD.RU		14		27		58.0	40.0	420	400
DRED-20S-16S.FLD.RU		16		30		58.0	39.5	420	400
DRED-25S-06S.FLD.RU	25	6	46	17	36.0	58.0	43.5	420	400
DRED-25S-08S.FLD.RU		8		19		58.0	43.5	420	400
DRED-25S-10S.FLD.RU		10		22		59.0	43.0	420	400
DRED-25S-12S.FLD.RU		12		24		59.0	43.0	420	400
DRED-25S-14S.FLD.RU		14		27		62.0	44.5	420	400
DRED-25S-16S.FLD.RU		16		30		62.0	44.0	420	400
DRED-25S-20S.FLD.RU		20		36		66.0	44.0	420	400
DRED-30S-06S.FLD.RU	30	6	50	17	41.0	66.0	51.0	420	400
DRED-30S-08S.FLD.RU		8		19		66.0	51.0	420	400
DRED-30S-10S.FLD.RU		10		22		67.0	50.5	420	400
DRED-30S-12S.FLD.RU		12		24		67.0	50.5	420	400
DRED-30S-14S.FLD.RU		14		27		70.0	52.0	420	400
DRED-30S-16S.FLD.RU		16		30		70.0	51.5	420	400
DRED-30S-20S.FLD.RU		20		36		73.0	51.5	420	400
DRED-30S-25S.FLD.RU		25		46		76.0	52.0	420	400
DRED-38S-06S.FLD.RU	38	6	60	17	50.0	70.5	56.0	420	315
DRED-38S-08S.FLD.RU		8		19		70.5	56.0	420	315
DRED-38S-10S.FLD.RU		10		22		71.5	55.5	420	315
DRED-38S-12S.FLD.RU		12		24		71.5	55.5	420	315
DRED-38S-14S.FLD.RU		14		27		74.5	57.0	420	315
DRED-38S-16S.FLD.RU		16		30		74.5	56.5	420	315
DRED-38S-20S.FLD.RU		20		36		78.5	56.5	420	315
DRED-38S-25S.FLD.RU		25		46		81.5	57.0	420	315
DRED-38S-30S.FLD.RU		30		50		85.5	58.5	420	315

По умолчанию уплотнительное кольцо O-Ring поставляется из материала NBR, либо Viton по запросу (стр. 126)